

## AE600-24GP4TF-L2

### 24 ports 1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink



- Ports:** Provide 24\*1000Mbps PoE ports with 4 Ports 10G SFP+ Uplink
- Self-adaption:** RJ45 port supports 1000Mbps Auto MDI/MDIX
- Fiber Port:** 4 Ports 10G SFP+ Uplink
- Wide Application:** Designed for Wi-Fi AP and IP Security camera, VoIP etc.
- Managed:** Support remote web managed, VLAN and storm control and IPV6 management etc.
- Surge Protection:** Protect the device from lightning surges and others electrical hazards
- Considerate Design:** Exquisite compact size, wall mounted with fanless design
- Easy to use:** Plug and play, No configuration required
- Installation:** Rack mount with easy installation

### Introducing a new Gigabit Managed PoE Switch for future-proof deployments

This 24-Port Gigabit Web Smart PoE+ Switch with 24 1000BASE-T PoE+ ports and four 10G SFP+ slots, It delivers advanced management features with a 256Gbps switching capacity. The AE600-24GP4TF-L2 is equipped with 1000BASE-T PoE+ ports that provide higher gigabit speeds capable of up to 1000Mbps over existing Cat5e or better cabling. This switch provides eight PoE+ connections with a max. power budget of 450W, and supplies up to 30W of power per port for devices such as wireless access points, PTZ IP cameras, and VoIP telephony systems.

### 1000Mbps Capability for Diversified Bandwidth Applications

With the terminal access rates of 802.11ac wireless APs reaching as high as 1Gbps, Gigabit ports has been unable to satisfy the demand. Supporting 1Gbps capability and 802.3af/at PoE output, the AE600-24GP4TF-L2 can deliver not only data to 802.11ac wireless APs, but also power to other powered devices such as APs and IP cameras.

### 10 Gbps SFP Ports Optimize Network Performance

The AE600-24GP4TF-L2 provides greater bandwidth and powerful processing capacity. It offers a maximum 40Gbps uplink bandwidth through the four 10Gbps SFP+ ports. In addition, the administrator can flexibly choose the suitable SFP/SFP+ transceiver according to the transmission distance or the transmission speed required to extend the network efficiently.

### Cost-effective IPv6 Managed Gigabit Ethernet Switch Solution

With layer 2+ managed Gigabit Ethernet Switch, It provides IPv6/IPv4 management and built-in L2/L4 Gigabit Switching engine, and supports high-speed transmission of surveillance images and videos.

### Surge Protection Design

Reaching 6KV surge protection, the Ethernet ports owns the capacity to keep the Ethernet Switch from lightning strikes and other electrical surges, offering reliable performance even in some harsh environments.

## AE600-24GP4TF-L2

24 ports 1000Mbps Managed PoE Switch with  
4 Ports 10G SFP+ Uplink

### TECHNICAL DATASHEET

<b>Model</b>	<b>AE600-24GP4TF-L2</b>	
<b>Hardware Specifications</b>		
Connector	24 10/100/1000BASE-T RJ45 auto MDI/MDIX ports 4 10G Base-X SFP+ Slots Uplink 1 Console port	
Uplink Port	4 10G Base-X SFP+ Slots	
LED Display	Power Indicator: PWR (green) Network Indicator: Link (yellow) POE: Orange SFP: Green	
Thermal Fan	Fanless Design	
Network Standard	IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z 1000BASE-SX/LX IEEE 802.3ab 1000BASE-T IEEE 802.3ae 10Gb/s Ethernet IEEE 802.3x flow control and back pressure IEEE802.3az EEE	
Switch Architecture	Store and Forward	
Transmission model	IEEE802.3X full-duplex and Backpressure half-duplex	
Switch Performance	Backplane bandwidth	256Gbps
	Packet forwarding rate	132.61Mpps
	MAC address	32k
Power Requirement	AC100-240V 50/60Hz	
ESD Protection	6KV ESD	
Dimension	440mm x 290mm x 44.5mm(17.32in x 11.42in x 1.75in)	
Weight	4.5kg	
Environment	Operating temperature: -20°C~55°C, operating humidity: 5%~95% Storage temperature: -40°C~75°C, storage humidity: 5%~95%	
Safety	FCC Part15 Class A, CE RoHs	

### Power over Ethernet (PoE) Specifications

PoE Standard	IEEE 802.3af Power over Ethernet/PSE IEEE 802.3at Power over Ethernet Plus/PSE
PoE Supply Type	1/2(+), 3/6(-) End-span
PoE Power Output	Per Port 52V DC, 300mA. Max. 15.4 watts (IEEE 802.3af) Per Port 52V DC, 600mA. Max. 30 watts (IEEE 802.3at)
PoE Power budget	400W

**AE600-24GP4TF-L2**

**24 ports 1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink**

**Layer 2 Functions**

Port Mirroring	TX / RX / both Many-to-1 monitor
Vlan	802.1Q tagged-based VLAN Up to 256 VLAN groups, out of 4094 VLAN IDs 802.1ad Q-in-Q tunnelling Voice VLAN; Protocol VLAN; Private VLAN (Protected port),GVRP
Link Aggregation	IEEE 802.3ad LACP and static trunk Supports 8 groups of 8-port trunk
Spanning Tree Protocol	STP, IEEE 802.1D Spanning Tree Protocol RSTP, IEEE 802.1w Rapid Spanning Tree Protocol MSTP, IEEE 802.1s Multiple Spanning Tree Protocol
IGMP Snooping	IGMP (v2/v3) snooping IGMP querier Up to 256 multicast groups
MLD Snooping	MLD (v1/v2) snooping, up to 256 multicast groups
Access Control List	IPv4/IPv6 IP-based ACL / MAC-based ACL
PoE Management	Open or close port Standard PoE scheduling management Power and current display Automatic restarting function of equipment dead machine Timing Support IP bindings restarting
QoS	8 mapping ID to 8 level priority queues --- Port number --- 802.1p priority --- 802.1Q VLAN tag --- DSCP field in IP packet Traffic classification based, strict priority and WRR
Security	IEEE 802.1X port-based authentication Built-in RADIUS client to co-operate with RADIUS server RADIUS / TACACS+ user access authentication IP-MAC port binding MAC filtering Static MAC address DHCP Snooping and DHCP Option 82 STP BPDU guard, BPDU filtering and BPDU forwarding DoS attack prevention ARP inspection

**Management Function**

Basic Management Interfaces	Web browser / Telnet / SNMP v1, v2c, V3 Firmware upgrade by HTTP / TFTP protocol through Ethernet network Remote / Local Syslog, System log, LLDP protocol, SNMP
-----------------------------	--


Specifications are subject to change without notice. AE CONNECT is a registered trademark of Ashutosh Enterprise and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2022 Ashutosh Enterprise. All rights reserved. E&OE.

# AE600-24GP4TF-L2


24 ports 1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink

Secure Management Interfaces	SSH, SSL, SNMP
SNMP MIBs	<ul style="list-style-type: none"> <li>RFC 1213 MIB-II</li> <li>RFC 1215 Generic Traps</li> <li>RFC 1493 Bridge MIB</li> <li>RFC 2674 Bridge MIB Extensions</li> <li>RFC 2819 RMON (1, 2, 3, 9)</li> <li>RFC 2863 Interface Group MIB</li> <li>RFC 3635 Ethernet-like MIB</li> </ul>

## Interfaces

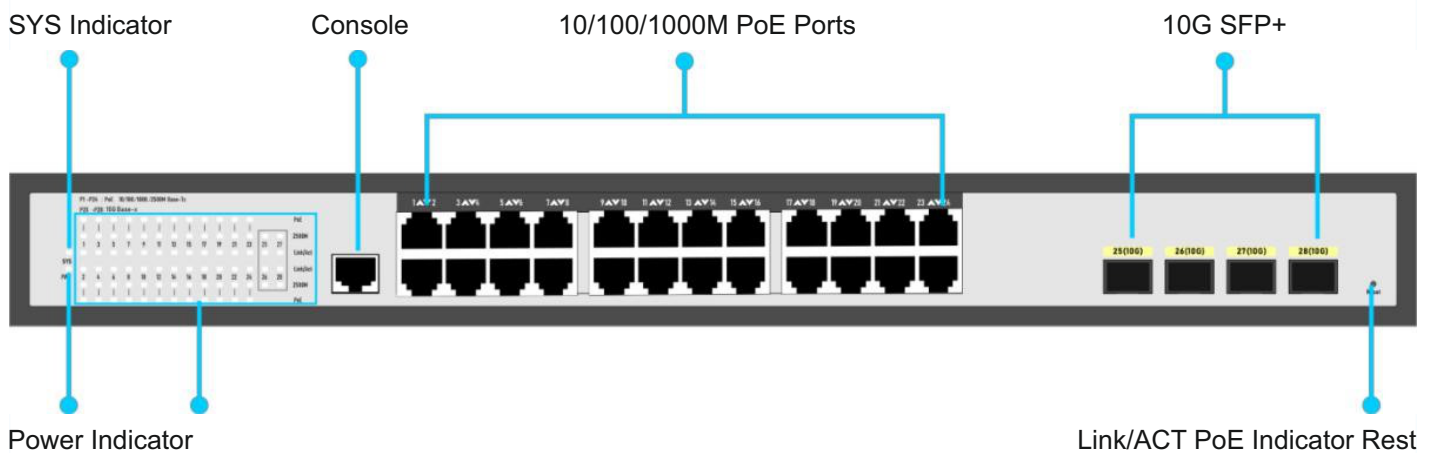

## Structure Diagrams

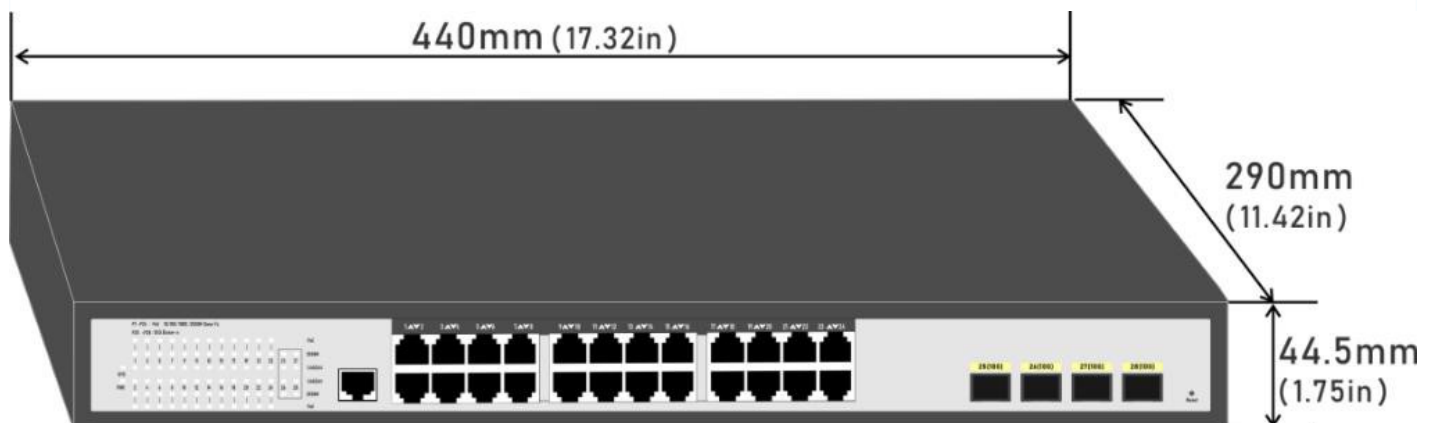


Specifications are subject to change without notice. AE CONNECT is a registered trademark of Ashutosh Enterprise and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2022 Ashutosh Enterprise. All rights reserved. E&OE.

## AE600-24GP4TF-L2

24 ports 1000Mbps Managed PoE Switch with  
4 Ports 10G SFP+ Uplink

### Applications

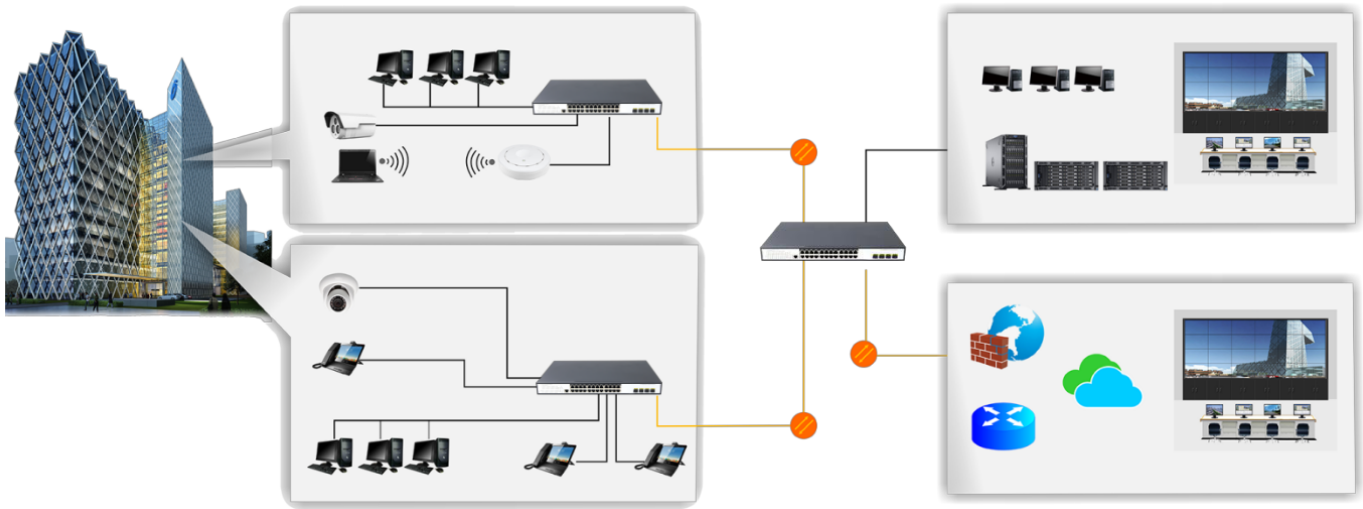

### ORDERING INFORMATION

AE600-24GP4TF-L2

24 Ports 10/100/1000Mbps Managed PoE Switch with 4 Ports 10G SFP+ Uplink,  
6KV surge protection